



## R-560C

Equivalent to Sealol Type43(DIN24960)

Equivalent to vulcan Type24

## R-BIA

Temperature: -20°C~150°C

Pressure: ≤1.5 MPa

Velocity: ≤13 m/s

Температура: -20°C~150°C

Давление: ≤1.5 МПа


Скорость: ≤13 м/сек

### COMBINED MATERIALS

- 1 Rotary Face: Carbon/SiC
- 2 Stationary Seat: Ceramic/SiC/TC
- 3 Flexible Member: NBR/VITON/EPDM
- 4 Spring: Stainless Steel
- 5 Metal Parts: Stainless Steel

### Материалы

- 1 Вращающееся кольцо: Carbon/SiC
- 2 Неподвижное кольцо: Ceramic/SiC/TC
- 3 Сильфон: NBR/EPDM/VITON.
- 4 Пружина: SS304/SS316.
- 5 Металлические части: SS304/SS316.

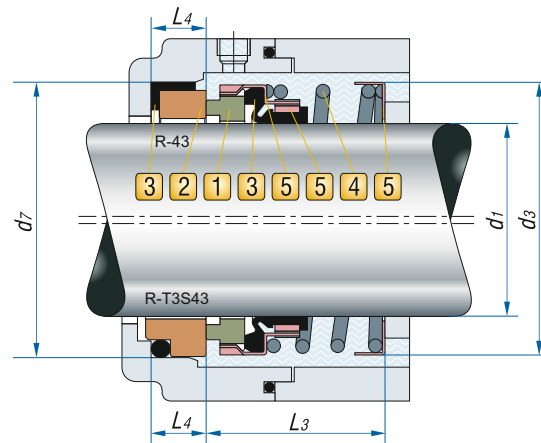

### R-560C

	d <sub>1</sub> (h6)	d <sub>3</sub> (Max)	d <sub>7</sub> (H8)	L <sub>3</sub> (±0.5)	L <sub>4</sub>
R-560C-10	10	20.5	21.0	23.9	8.6
R-560C-12	12	22.5	23.0	23.9	8.6
R-560C-14	14	24.5	25.0	26.4	8.6
R-560C-16	16	26.5	27.0	26.4	8.6
R-560C-18	18	30.5	33.0	27.5	10.0
R-560C-20	20	34.0	35.0	27.5	10.0
R-560C-22	22	36.0	37.0	27.5	10.0
R-560C-24	24	40.0	39.0	30.0	10.0
R-560C-25	25	40.0	40.0	30.0	10.0
R-560C-28	28	42.0	43.0	32.5	10.0
R-560C-30	30	45.0	45.0	32.5	10.0
R-560C-32	32	47.0	48.0	32.5	10.0
R-560C-33	33	47.0	48.0	32.5	10.0
R-560C-35	35	50.0	50.0	32.5	10.0
R-560C-38	38	55.0	56.0	34.0	11.0
R-560C-40	40	57.0	58.0	34.0	11.0
R-560C-43	43	59.0	61.0	34.0	11.0
R-560C-45	45	61.5	63.0	34.0	11.0
R-560C-48	48	65.5	66.0	34.0	11.0
R-560C-50	50	67.5	70.0	34.5	13.0
R-560C-53	53	70.5	73.0	34.5	13.0
R-560C-55	55	72.0	75.0	34.5	13.0
R-560C-58	58	78.5	78.0	39.5	13.0
R-560C-60	60	80.0	80.0	39.5	13.0
R-560C-63	63	83.0	83.0	39.5	13.0
R-560C-65	65	84.5	85.0	39.5	13.0
R-560C-68	68	88.0	90.0	37.2	15.3
R-560C-70	70	90.0	92.0	44.7	15.3
R-560C-75	75	99.0	97.0	44.7	15.3
R-560C-80	80	104.0	105.0	44.3	15.7

### R-BIA

	d <sub>1</sub> (h6)	d <sub>3</sub> (Max)	d <sub>7</sub> (H8)	L <sub>3</sub> (±0.5)	L <sub>4</sub>
R-BIA-14	14	24.5	30	18.7	5.0
R-BIA-16	16	26.5	32	21.0	5.0
R-BIA-18	18	30.5	35	22.5	7.5
R-BIA-20	20	34.0	35	21.0	8.0
R-BIA-24	24	40.0	39	25.5	8.0
R-BIA-25	25	40.0	40	25.5	8.0
R-BIA-28	28	42.0	43	25.5	8.0
R-BIA-30	30	45.0	45	25.5	9.0
R-BIA-32	32	47.0	48	33.5	9.0
R-BIA-33	33	47.0	48	33.5	9.0
R-BIA-35	35	50.0	50	33.5	9.0
R-BIA-38	38	55.0	56	33.5	9.0
R-BIA-40	40	57.0	58	33.5	9.0
R-BIA-43	43	59.0	61	36.5	9.5
R-BIA-45	45	61.5	63	38.0	9.5
R-BIA-48	48	65.5	66	38.0	9.5
R-BIA-50	50	67.5	70	38.0	9.5
R-BIA-53	53	70.5	73	41.0	9.5
R-BIA-55	55	72.0	75	41.0	9.5
R-BIA-58	58	78.5	78	42.0	9.5
R-BIA-60	60	80.0	80	42.0	9.5
R-BIA-65	65	84.5	85	43.0	9.5
R-BIA-70	70	90.0	92	45.0	11.0
R-BIA-75	75	99.0	97	48.0	12.0
R-BIA-80	80	104.0	104	55.0	12.0

### Неподвижное кольцо

Тип (мм): R-560C кольцо R-43 - R-BIA кольцо R-B  
По запросу: R-560C кольцо R-T3S43 - R-BIA кольцо R-3B