

BS560A



Parameter

Temperature: $-20^{\circ}\text{C} \sim 150^{\circ}\text{C}$

Pressure: $\leq 0.80\text{Mpa}$

Linear Velocity: $\leq 10\text{m/S}$

Medium: water, oil, weak corrosive mediums


Materials

Rotary Ring: Carbon/SiC/TC

Stationary Ring: Ceramic/SiC/TC

Secondary Seals: NBR/EPDM/VITON

Spring and Metal Parts: SS304/SS316

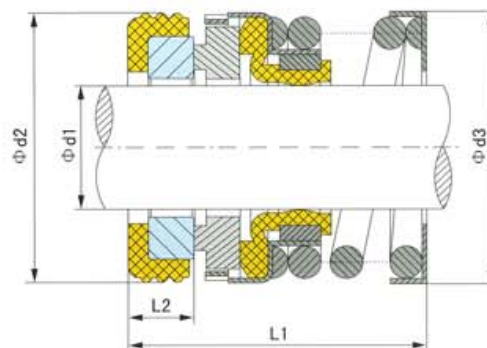

Model	d1	d3	d2	L1	L2
BS560A-10	10	23.5	24	25	7
BS560A-11	11	23.5	24	25	7
BS560A-12	12	26	26	25	7
BS560A-14	14	28	28	25.5	7
BS560A-15	15	30	28	29.5	7
BS560A-16	16	32	32	33.5	10
BS560A-18	18	32.5	35	36.5	10
BS560A-19	19	32.5	35	36.5	10
BS560A-20	20	35.5	38	38	10
BS560A-22	22	37.5	40	40.3	10
BS560A-25	25	42	44	39.3	10
BS560A-28	28	45.5	46	40	10
BS560A-30S	30	46	45	38.2	7.5
BS560A-30L	30	48	50	40	10
BS560A-32	32	50	54	40	10
BS560A-35	35	54.5	58	42	10
BS560A-38	38	58.5	60	42.6	10
BS560A-40	40	62.5	64	42.6	10
BS560A-45	45	66.5	66	45	10
BS560A-50	50	72.5	72	54.6	10
BS560A-55S	55	72	75	59.4	12
BS560A-55L	55	76	78	59.8	12
BS560A-60	60	80	80	63	12
BS560A-65	65	85	85	64	13
BS560A-70	70	92	92	60	11

Model	d1	d3	d2	L1	L2
BS560A-3/8"	9.525	23.5	22.225	28.6	6.4
BS560A-1/2"	12.7	26	25.4	28.6	6.4
BS560A-5/8"	15.875	30	31.75	32.5	8.7
BS560A-3/4"	19.05	32.5	34.925	32.5	8.7
BS560A-7/8"	22.225	37.5	38.1	34.1	8.7
BS560A-1"	25.4	44	41.275	36.5	9.5
BS560A-1 1/8"	28.575	48	44.45	38.1	9.5
BS560A-1 1/4"	31.75	50	47.625	38.1	9.5
BS560A-1 3/8"	34.925	54.5	50.8	39.7	9.5
BS560A-1 1/2"	38.1	58.5	53.975	39.7	9.5
BS560A-1 5/8"	41.275	64	60.325	47.6	11.1
BS560A-1 3/4"	44.45	67	63.5	47.6	11.1
BS560A-1 7/8"	47.625	71	66.675	50.8	11.1
BS560A-2"	50.8	73.5	69.85	50.8	11.1
BS560A-2 1/4"	57.15	78.4	79.38	57.16	13.5
BS560A-2 1/2"	63.5	84.9	85.73	60.3	13.5
BS560A-2 5/8"	66.675	88.4	85.73	65.1	15.9
BS560A-2 3/4"	69.85	92.6	88.9	65.1	15.9
BS560A-2 7/8"	73.025	94.9	95.25	68.27	15.9
BS560A-3"	76.2	101.9	98.43	68.27	15.9